

NINETY ONE

BICYCLE ASSEMBLY GUIDE



***FAST. FIERCE.
& ABSOLUTELY
STRIKING!***



MODEL

27.T MERAKI (E-BIKE)

SIZE DETAILS

♀ M

📅 12+ YRS

📏 5.4' - 6.3'

🛞 27.5" / 69 CM



PACKING LIST

- Frame
- Handlebar
- Pedal (2 nos)
- Allen key & all size key
- Front tire
- Saddle
- Front and rear reflector
- Motor Guard
- Charger

*Pls ensure the above items are included in the packing list.

STEP 1



UNBOXING YOUR BIKE

Your 27.5T Meraki comes 85% assembled. In few short steps, you will be ready to ride your dream machine.

- 1) Use a pair of scissors to cut the safety strap along the carton.
- 2) Remove the cycle from the box along with all the parts.
- 3) Use a pair of scissors / cutter to remove all the cable ties from the box. (Be careful not to damage the paint on the cycle)
- 4) Untie the front wheel and the handle bar from the frame and keep them next to the cycle.

STEP 2

91



HANDLE BAR INSTALLATION

- 1) Rest the bike on the rear wheel and fork.
- 2) Loosen steerer clamp bolt and adjust direction of stem to front of cycle.
- 3) Remove handle bar clamp bolt and fit the handle bar on the stem and tighten the bolts.
- 4) Ensure that handle bar is in the center aligned with the stem
- 5) Make the brakes levers parallel to handle bar and the tighten the nut on the brake lever. Do this for both brake levers.
- 5) Install the front reflector on top of the arch of front suspension

Tip: Adjust the handlebar angle so your hands are slightly bend when riding)

STEP 3

91



CONNECTORS

- 1) Line up to notch in the connectors
- 2) Match the externally matched arrows
- 3) Match the same colored connectors with their respective male and female parts
- 4) Insert the combiner in the grommet and ensure its fixed always when you ride

STEP 4

91



FRONT TIRE

- 1) Insert the front wheel into the dropout and ensure the rotor of disc fits into the gap of brake pads.
- 2) Insert the quick release into the axel and tighten the nut.
- 3) Check with lever for tension. Once resistance is met half way close the lever.

*Tip: A fully tightened nut will leave impression on your hand when closing the lever.

STEP 5

91




SEAT POST AND SADDLE

- 1) See the direction arrow for the end that goes inside the seat post.
- 2) Install the rear reflector (Red) on the top most position of the seat tube, this will give you full access of the seat tube.
- 3) Insert the seat post inside the seat tube beyond the minimum insertion mark
- 4) The seat post clamp will be attached to the frame Tighten the clamp by rotating it clockwise and lock it using the lever.
- 5) Put the saddle on top of the seat post and align it to the top tube and tighten the bolt

*Tip: When tight enough the saddle won't move with your hands.

STEP 6

91

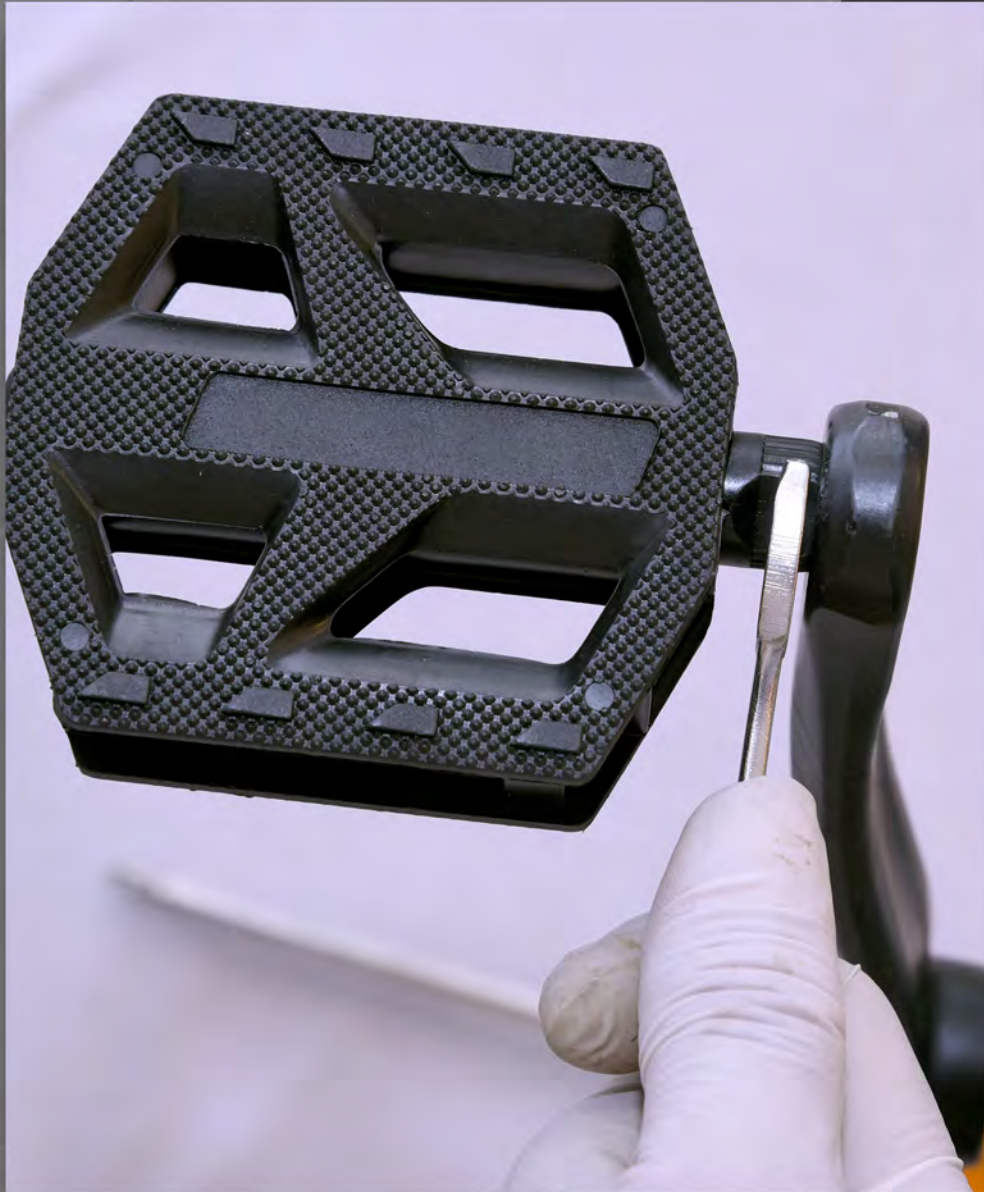

PEDALS

- 1) Fitting the pedals is very simple but requires attention.
- 2) Left and the right pedal are marked with L (Left - opposite side of chain) and R (Right - the chain side).
- 3) Correct pedal should inserted in the correct crank.
- 4) Use Allen Key to tighten the pedals.
- 5) The Right pedal tightens clockwise direction and the left pedal tightens in anti-clockwise direction.

NINETY ONE

**CHECK OUT THE
DETAILED ASSEMBLY
VIDEO GUIDE ON YOUTUBE**

LEARN MORE



**UPLOAD YOUR BIKE
IMAGES ON INSTAGRAM
USING #ninetyonecycles**

FOLLOW NOW

